

SOT-23 Plastic-Encapsulate Switching Diode

Features

- 4.0nS; Fast Switching Device (TRR <4.0nS)
- 150mW; Power Dissipation of 150mW
- High Stability and High Reliability.
- Low reverse leakage

Mechanical Data

- SOT-23, Small Outline Plastic Package.
- Epoxy UL: 94V-0
- Mounting Position: Any





Marking: A3

SOT-23

Pin definition

Epuivalent circuit



Maximum Ratings & Thermal Characteristics(TA=25°C unless otherwise noted)				
Parameters	Symbol	Value	Unit	
Reverse Voltage	V _R	80	V	
Peak Repetitive Reverse Voltage	V _{RRM}	85	V	
Power Dissipation	PD	150	mW	
Average Rectified Current	Ι _Ο	100	mA	
Non-Repetitive Peak Forward Surge Current @t=8.3ms; TA=25℃	I _{FSM}	2.0	А	
Operating junction temperature	TJ	150	°C	
Storage temperature range	Ts	-55-+150	°C	
Thermal Resistance from Junction to Ambient	R _{θJA}	833	°C/W	

Valid provided that electrodes are kept at ambient temperature.


Parameter		Test Condition	Limits			
	Symbol		Min	Тур	Max	Unit
ReverseVoltage	V(BR)	IR=100uA	80			V
Reverse Leakage Current		VR=80V			0.5	uA
	IR	VR=30V			0.1	uA
Forward Voltage		IF=1mA		0.61	1.20	V
	VF	IF=10mA		0.74		
	•.	IF=100mA		0.92		
Reverse Recovery Time	Trr	IF= IR=10mA VR=6V,RL=100 Ω IRR=0.1 X IR			4	nS
Capacitance	Ст	VR=0V,f=1MHZ		2.2	4	pF



1SS181 GOOD-ARK Electronics

Ratings and Characteristics Curves


(TA = 25°C unless otherwise noted)

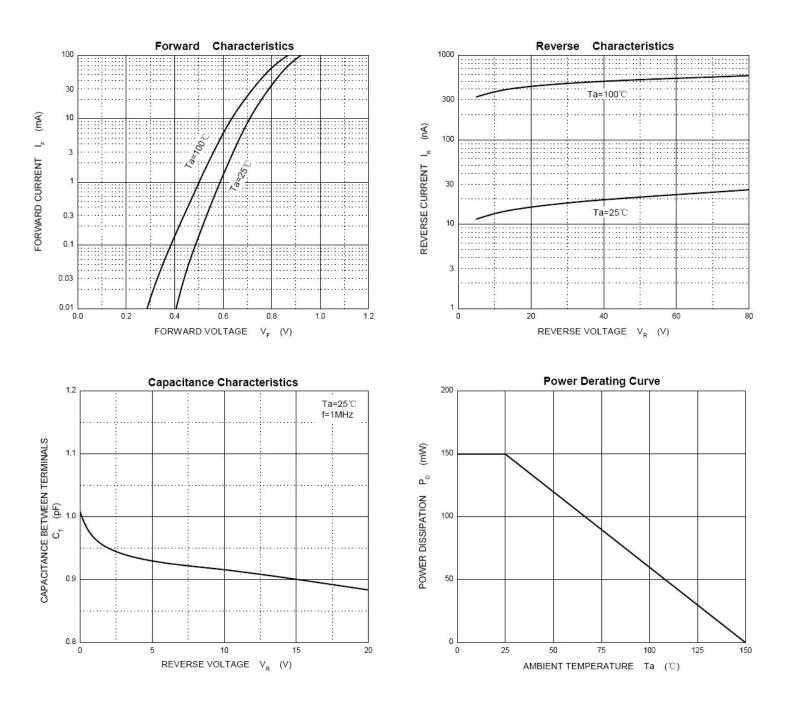



Package Outline Dimensions

millimeters

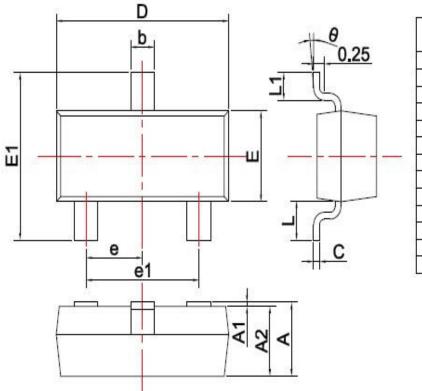

SYMBOL	DIMENSIONS		
	MIN.	MAX	
A	0.900	1.150	
A1	0.000	0.100	
A2	0.900	1.050	
b	0.300	0.500	
С	0.080	0.150	
D	2.800	3.000	
E	1.200	1.400	
E1	2.250	2.550	
е	0.950TYP		
e1	1.800	2.000	
L	0.550REF		
L1	0.300	0.500	
6	0°	8°	

Revision History

Document Version	Date of release	Description of changes
Rev.A	2019.10.31	First issue



Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd.or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page. (http://www.goodark.com)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.