


SOT-23 Plastic-Encapsulate Transistors

Features

- Complementary to MMBTA92
- 350mW; Power Dissipation of 350mW
- High Stability and High Reliability.




Marking: 1D SOT-23

Mechanical Data

- SOT-23, Small Outline Plastic Package.
- Epoxy UL: 94V-0
- Mounting Position: Any

Pin definition







Maximum Ratings & Thermal Characteristics (T _A =25°C unless otherwise noted)			
Parameters	Symbol	Value	Unit
Collector-Base Voltage	V _{CBO}	300	V
Collector-Emitter Volta	V _{CEO}	300	V
Emitter -Base Voltage	V _{EBO}	5	V
Collector Current-Continuous	I _C	300	mA
Collector Power Dissipation	P _C	350	mW
Junction Temperature	T _J	150	°C
Storage Temperature	T _{STG}	-55-+150	°C
Thermal resistance From junction to ambient	R _{θJA}	357	°C/W

Electrical Characteristics (T _A =25°C unless otherwise noted)					
Parameter	Symbols	Test Condition	Limits		Unit
			Min	Max	
Collector -base breakdown voltage	V(BR)CBO	I _C =100uA, I _E =0	300		V
Collector -emitter breakdown voltage	V(BR)CEO	I _C =1mA, I _B =0	300		V
Emitter -base breakdown voltage	V(BR)EBO	I _E =10uA, I _C =0	5		V
Collector cut -off current	I _{CBO}	V _{CB} =200V, I _E =0		250	nA
Emitter cut -off current	I _{EBO}	V _{EB} =5V, I _C =0		100	nA
DC current gain	hFE(1) *	V _{CE} =10V, I _C =1mA	60		
	hFE(2) *	V _{CE} =10V, I _C =10mA	100	200	
	hFE(3) *	V _{CE} =10V, I _C =30mA	65		
Collector -emitter saturation voltage	V _{CE(sat)}	I _C =20mA, I _B =2mA		0.20	V
Base - emitter saturation voltage	V _{BE(sat)}	I _C =20mA, I _B =2mA		0.90	V
Transition frequency	f _T	V _{CE} =20V, I _C =100mA, f=30MHz	50		MHz

*Pulse test: pulse width ≤ 300us, duty cycle ≤2.0%.





Ratings and Characteristics Curves

($T_a = 25^\circ\text{C}$ unless otherwise noted)

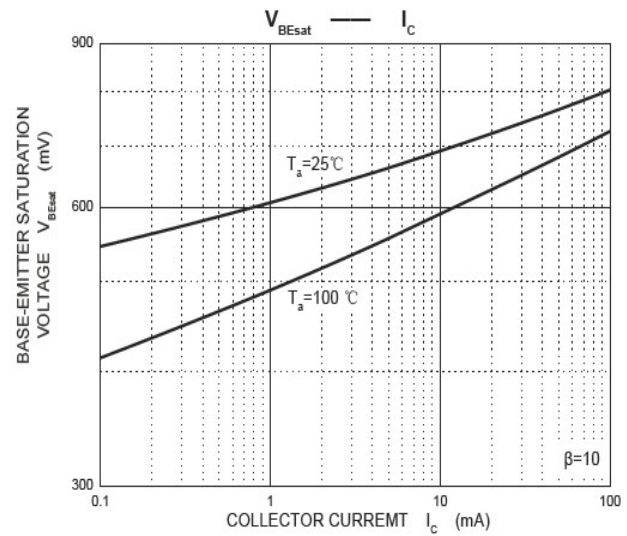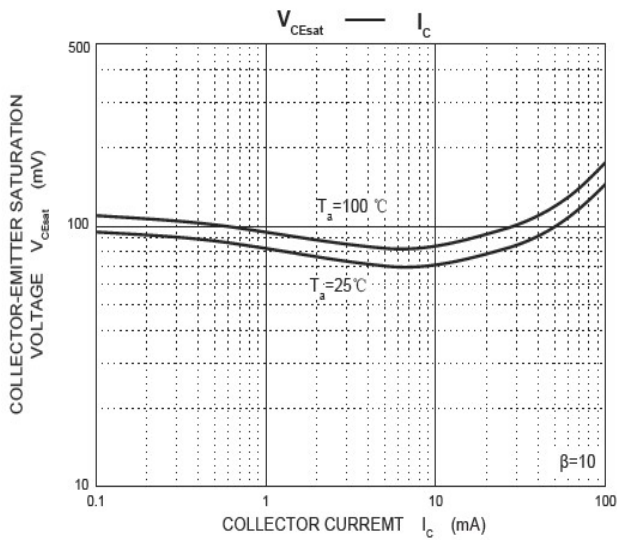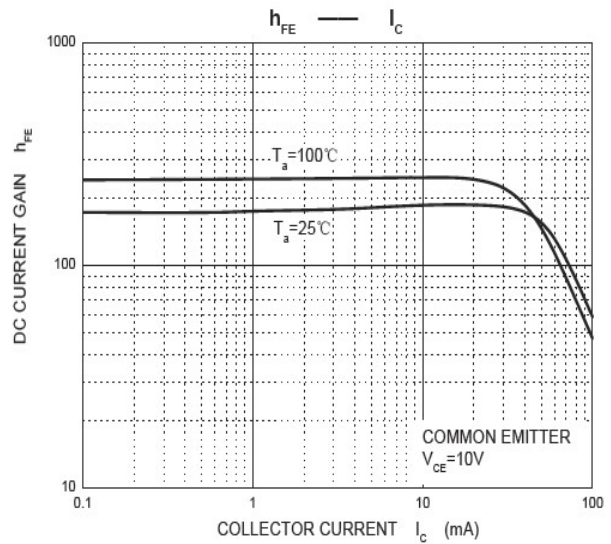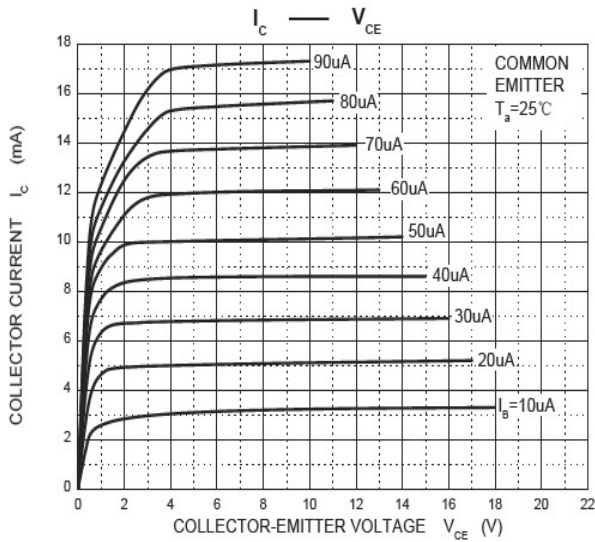


Ratings and Characteristics Curves

($T_A = 25^\circ\text{C}$ unless otherwise noted)

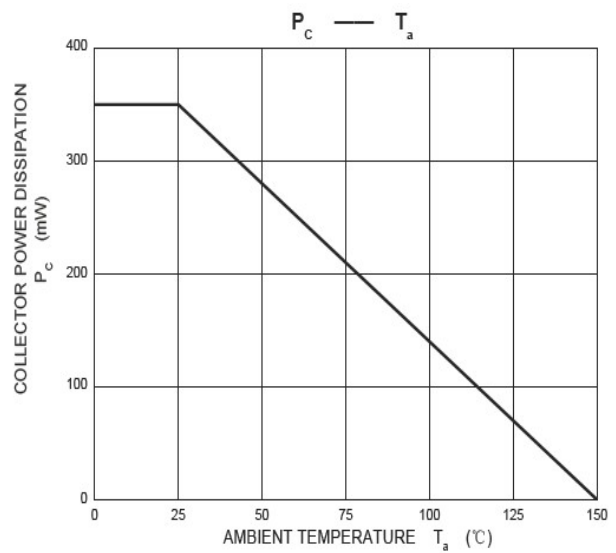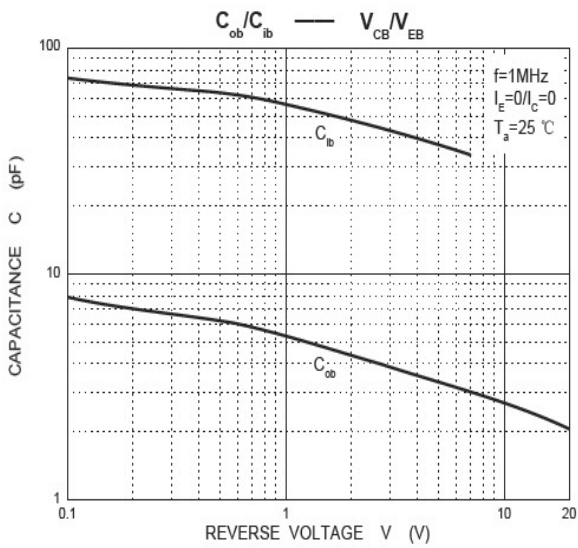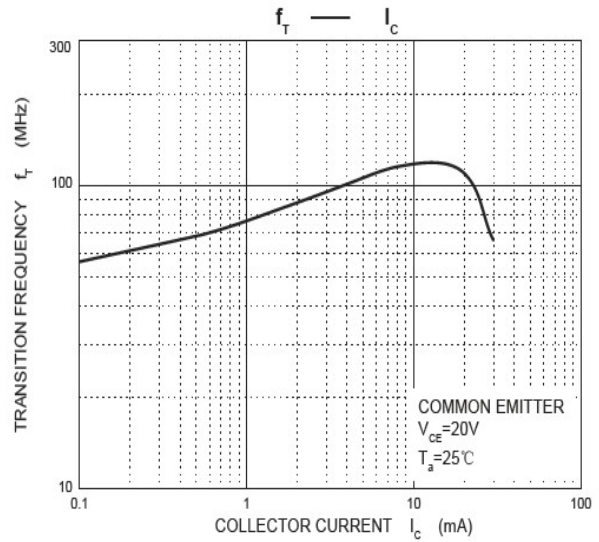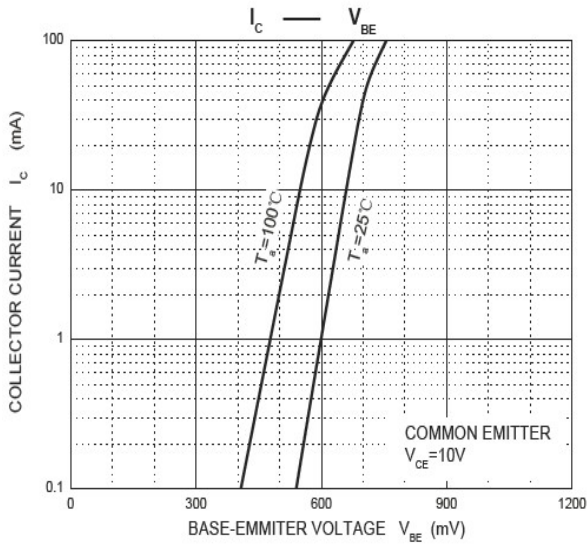

Package Outline Dimensions

in inches (millimeters)

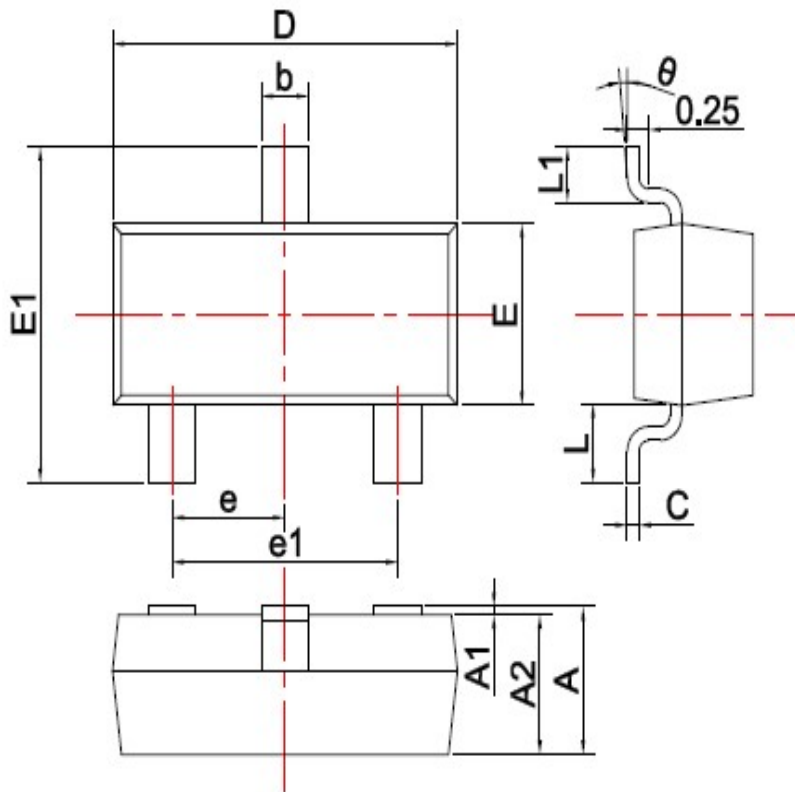

SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	0.900	1.150
A1	0.000	0.100
A2	0.900	1.050
b	0.300	0.500
c	0.080	0.150
D	2.800	3.000
E	1.200	1.400
E1	2.250	2.550
e	0.950TYP	
e1	1.800	2.000
L	0.550REF	
L1	0.300	0.500
θ	0°	8°

Unit: mm

Revision History

Document Version	Date of release	Description of changes
Rev.A	2017.06.13	First issue

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss arising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.

(<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.