

GOOD-ARK Electronics

SOT -23 Plastic-Encapsulate Tranaiators

Features

- Complementary to BC856/BC857/BC858
- Power Dissipation of 200mW
- Ideally suited for automatic insertion
- For switching and AF amplifier applications

Mechanical Data

• SOT-23 Small Outline Plastic Package

Epoxy UL: 94V-0Mounting Position: Any

Junction Temperature

Storage Temperature

Thermal resistance From junction to ambient



RoHS

COMPLIANT



150

-55-+150

625



Pin definition

3. COLLECTOR

 $^{\circ}$ C

 $^{\circ}$

°C/W



Maximum Ratings & Thermal Characteristi(Ta=25°C unless otherwise noted)					
Parameters	Symbol		Value	Unit	
	.,	BC846	80		
Collector-Base Voltage	V_{CBO}	BC847	50	V	
		BC848	30		
	.,	BC846	65		
Collector-Emitter Voltage	V_{CEO}	BC847	45	V	
		BC848	30		
Emitter -Base Voltage	V_{EBO}		6	V	
Collector Current-Continuous	I _C		100	mA	
Collector Power Dissipation	P _C		200	mW	

 T_{J}


 T_{STG} $R_{\theta JA}$

Electrical Characteristics (TA=25°C unless otherwise noted)							
Parameter	G la . la	Test Condition		Limits			
Parameter	Symbols			Min	Max	Unit	
Collector-base breakdown voltage	V(BR)CBO	IC=10uA, I	E=0	BC846 BC847 BC848	80 50 30		V
Collector-emitter breakdown voltage	V(BR)CEO	IC=10mA,	IB=0	BC846 BC847 BC848	65 45 30		٧
Emitter-base breakdown voltage	V(BR)EBO	IE=10uA, I	C=0		6		V
Collector cut-off current	ICBO	VCB=70V, VCB=50V, VCB=30V,	IE=0	BC846 BC847 BC848		100	nA
Collector cut-off current	ICEO	VCE=60V, VCE=45V, VCE=30V,	IB=0	BC846 BC847 BC848		100	nA
Emitter cut-off current	IEBO	VEB=5V, I	C=0			100	nA
DC current gain	hFE	VCE=5V, IC=2mA		A;BC847A;BC848A B;BC847B;BC848B BC847C;BC848C	110 200 420	220 450 800	
Collector-emitter saturation voltage	VCE(sat)	IC=100mA	, IB=5mA			0.50	V
Base -emitter saturation voltage	VBE(sat)	IC=100mA	, IB=5mA			1.10	V
Transition frequency	fT	VCE=5V, IC=10mA,f=100MHz		100		MHz	
Collector output capacitance	Cob	VCB=10V,	f=1MHz			4.5	pF



Ratings and Characteristics Curves


(TA = 25°C unless otherwise noted)

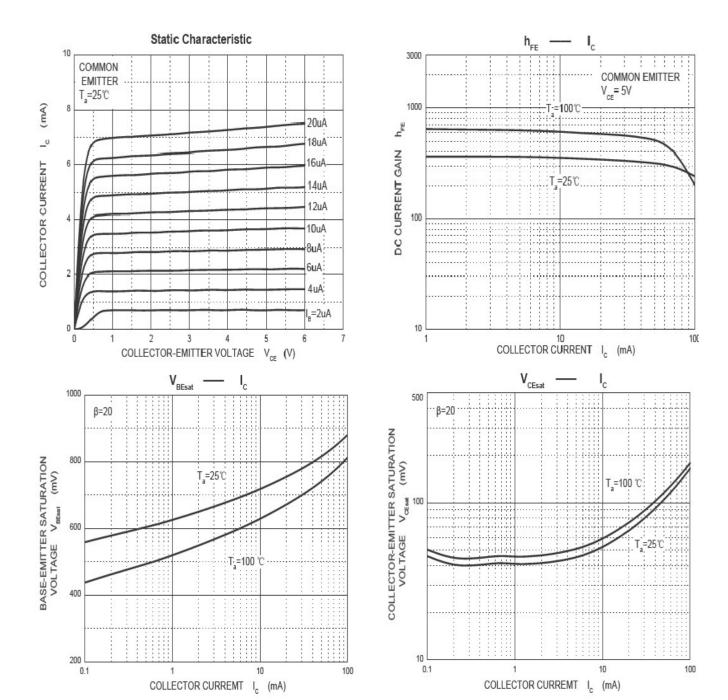






Ratings and Characteristics Curves

(TA = 25°C unless otherwise noted)

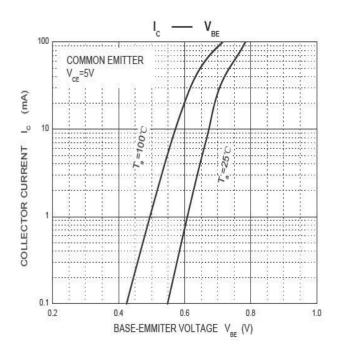

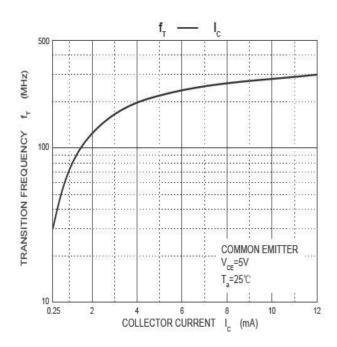

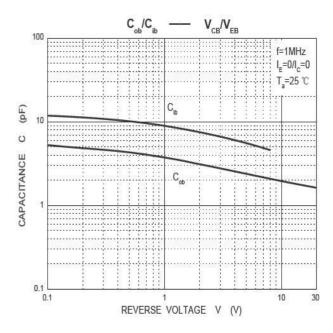


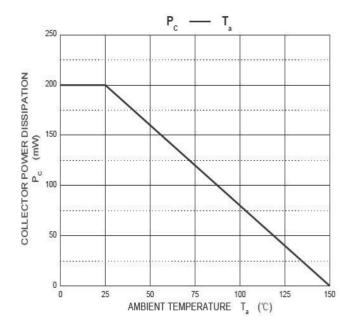



Package Outline Dimensions

millimeters

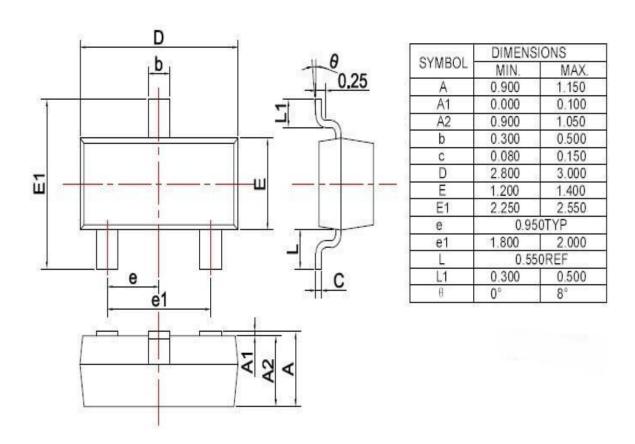

Revision History

Document Version	Date of release	Description of changes	
Rev.A	2017.06.26	First issue	



Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd.or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any thirdparty's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.

(http://www.goodark.com)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.